



MATERIALS

Head:
Aluminium alloy

Spin-on cartridge:
Steel

Bypass valve:
Polyamide

Seals:
NBR Nitrile

Indicator housing:
Brass

PRESSURE (ISO 10771-1:2002)

Max working:
1,2 MPa (12 bar)

Test:
1,5 MPa (15 bar)

Bursting:
2,5 MPa (25 bar)

Collapse, differential
for the filter element (ISO 2941):
400 kPa (4 bar)

BYPASS VALVE


Setting:
35 kPa (0,35 bar) $\pm$ 10%

WORKING TEMPERATURE


From -25° to +110° C

COMPATIBILITY (ISO 2943:1999)

Full with fluids: HH-HL-HM-HV-HTG
(according to ISO 6743/4)

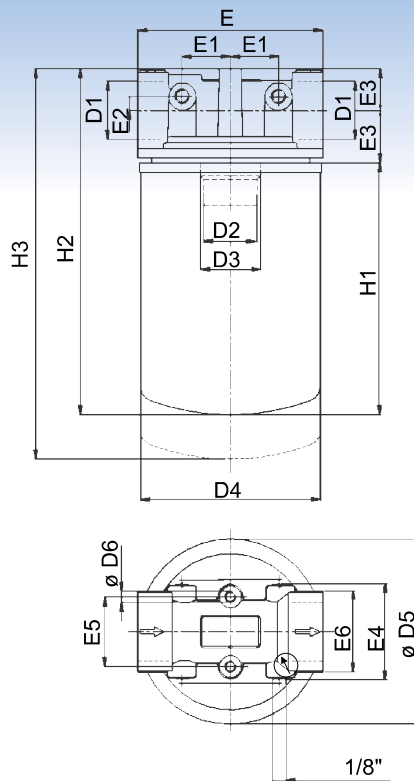

FHFL11 & FHFL12

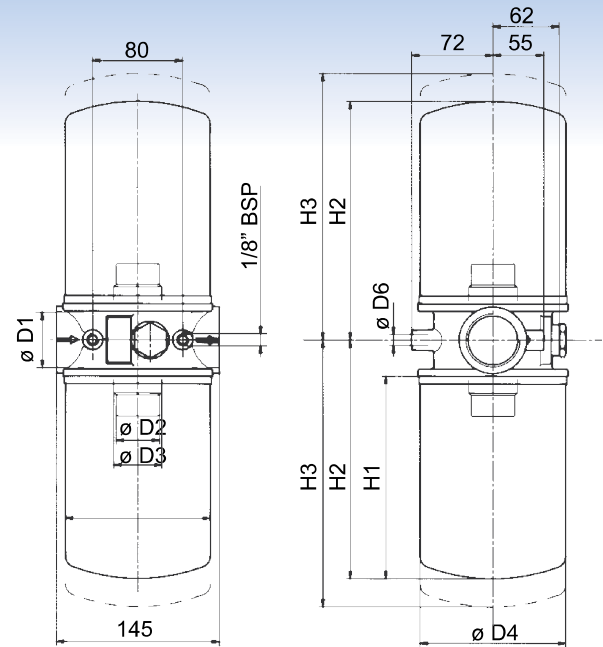

FHFL21 & FHFL31




SPIN ON FILTER HOUSING

	D1	D2	D3	D4	D5	D6	E	E1	E2	E3	E4	E5	E6	H1	H2	H3	kg
FHFL11	3/4"	3/4" BSP	-	96	96	M8	95	20,5	7	20	49	38	37	145	188	208	1.2
FHFL12	3/4"	3/4" BSP	-	96	96	M8	95	20,5	7	20	49	38	37	191	234	254	1.5
FHFL21	1" 1/4	1" 1/2 16-UN	1" 1/4 BSP	129	134	M8	133	35	10	30	64	50	57	181	248	278	1.9
FHFL31	1" 1/2	1" 1/2 16-UN	1" 1/4 BSP	129	-	M10	-	-	-	-	-	-	-	181	216	246	3.5


PRESSURE DROP CURVES (Δp)

The "Assembly Pressure Drop (Δp)" is obtained by adding the pressure drop values of the Filter Housing and of the Clean Filter Element corresponding to the considered Flow Rate and it must be lower than 3 kPa (0,03 bar).



FILTER HOUSING
PRESSURE DROP

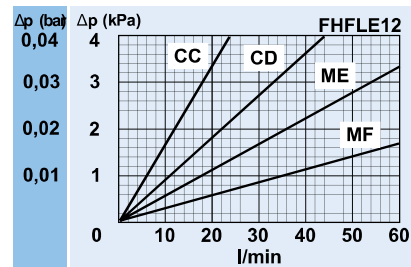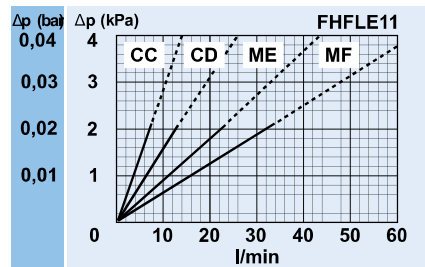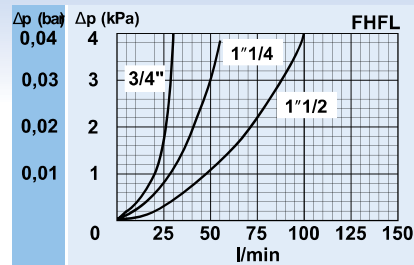

CLEAN FILTER ELEMENT
PRESSURE DROP
WITH C+ AND M+ MEDIA

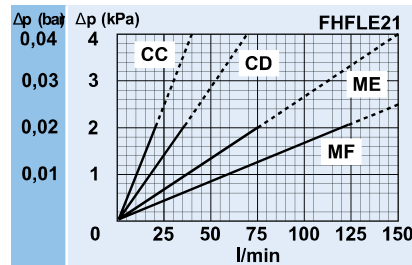


BYPASS VALVE
PRESSURE DROP

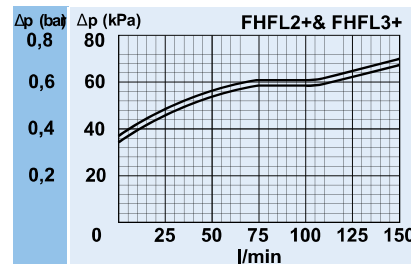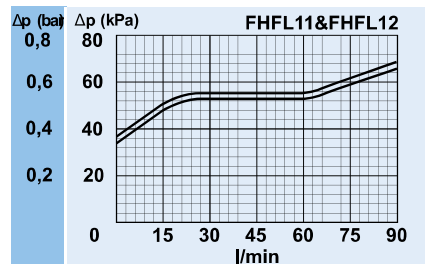

N.B. All the curves have been obtained with mineral oil having a kinematic viscosity 30 cSt and specific gravity 0,9 kg/dm³; for fluids with different features,

FILTER ELEMENT						
PART NO	A	B	C	kg	Area (cm ²)	
					Media M+	Media C+
FHFLE11	96,5	3/4" BSP	146	0,70	980	3.305
FHFLE12	96,5	3/4" BSP	191	0,80	1.390	4.745
FHFLE21	129	1" 1/4 BSP	181	1,20	1.940	5.560
FHFLE22	129	1" 1/4 BSP	226	1,40	2.570	7.360



TYPE													
H	F	L	F = FILTER COMPLETE B = FILTER HOUSING				F	F	F	F	ELEMENT		E
			B	B	B	B							
FAMILY NOMINAL SIZE & LENGTH			11	12	21	31	FAMILY SIZE & LENGTH			H	F	L	
PORT TYPE													
B = BSP thread			B	B	B	B							
F = SAE flange 3000 psi, metric screws			-	-	-	-							
PORT SIZE (quote "D1")													
06 = 3/4			06	06	-	-							
10 = 1" 1/4			-	-	10	-							
12 = 1" 1/2			-	-	-	12							
BYPASS VALVE													
W = without			W	W	W	W							
A = 35 kPa (0,35 bar)			A	A	A	A							
SEALS							SEALS						
N = NBR Nitrile			N	N	N	N	N = NBR						
F = FKM Fluoroelastomer			F	F	F	F	F = FKM						
FILTER MEDIA							FILTER MEDIA						
CC = cellulose 10µm β>2			CC	CC	CC	CC	CC = cell. 10µm						
CD = cellulose 25µm β>2			CD	CD	CD	CD	CD = cell. 25µm						
ME = metal wire mesh 60µm			ME	ME	ME	ME	ME = w. mesh µ60 m						
MF = metal wire mesh 90µm			MF	MF	MF	MF	MF = w. mesh µ90 m						
CLOGGING INDICATOR													
06 = 1/8" seat, plugged			06	06	06	06							
10 = vacuum gauge, bottom connection			10	10	10	10							
91 = SPDT, vacuum switch			91	91	91	91							