



TECHNICAL DATA:

Cap : Chrome plated steel.
Lock and chains : Galvanized steel.
Pressure valve : on request.
Working temperature : -25° to +110°C
seals : Rubberized cork.

FILTRATION :


Basket : Powder coated steel.
Filtration : 40 microns foam.
Celulose media : on request.

AIR FLOW RATES :


5 CFM & 25CFM.

Filler Breathers


FBA

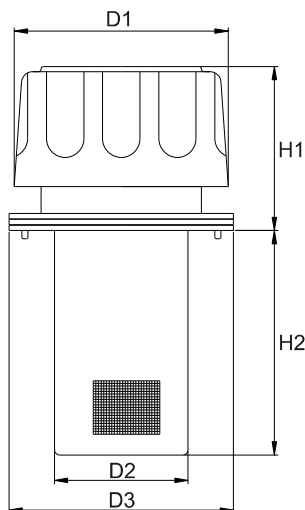


DIMENSIONS

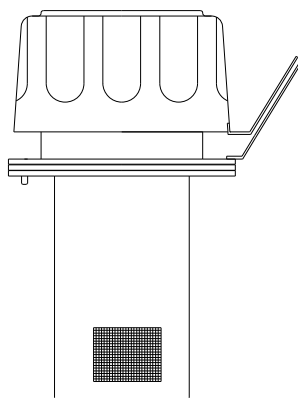

OPTION 'L'
Padlock holder version

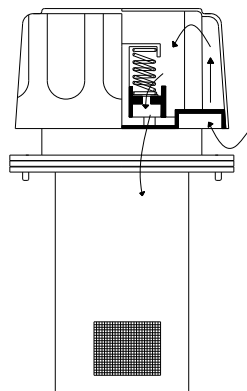

OPTION 'P'
Pressurization valve (0.35 bar)



MOUNTING HOLES

HYDRAULIC ACCESSORIES

Part No.	Filtr. μ	Flow rate (l/min)	D1	D2	D3	D4	holes n°	D5	D6	H1	H2
FBA5F40	40	150	47	29	52	M5	3	31	41	48	64
FBA5F10	10	300	47	29	52	M5	3	31	41	48	64
FBA25F40	40	450	80	50	83	M5	6	52	73	57	78
FBA25F10	10	750	80	50	83	M5	6	52	73	57	78
FBA25F40L148	40	450	80	50	83	M5	6	52	73	57	148
FBA25F10L148	10	750	80	50	83	M5	6	52	73	57	148
FBA25F40L100	40	450	80	40	83	M5	6	52	73	57	100
FBA25F10L100	10	750	80	40	83	M5	6	52	73	57	100

All dimensions are in mm or otherwise stated

FFP PRODUCTS (HYDRAULICS DIVISION)

17, SAI NIKETAN, CHANDAVARKAR LANE, BORIVALI WEST,
MUMBAI 400 092, MAHARASHTRA, INDIA
Tel: +91 22 28925607 Fax: +91 22 28904071
e-mail: info@ffpproducts.com - <http://www.ffpproducts.com>

