



Air Breathers with Splash Gaurd

FBP

MATERIALS

Body: Polyamide 66

Basket: Powder Coated Steel

Filter media:

CL =Cellulose

IF = Inorganic fiber


Filtration degree (in air): 25µm

COMPATIBILITY

Full with fluids HH - HL - HM - HR - HV - HG
(according to ISO 6743/4).

WORKING TEMPERATURE

From -25°C to 110°C

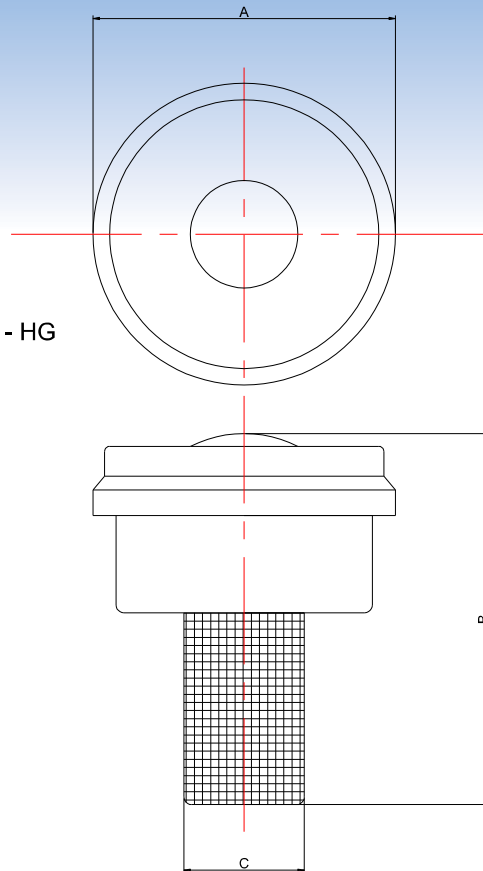

HYDRAULIC ACCESSORIES

Part No	Filtration	Flow rate (CFM)	A	B	C	Spare cartridge	All dimensions are in mm or otherwise stated
FPBA2510	10µ	50	118	145	47	FPBA25E10	
FPBA2525	25µ	50	118	145	47	FPBA25E25	